



Smart Architecture of Espadana

Designing, Production, Customization and Consultant Service
in Network and Fiber Optic System



Technical Specification

SAE-4V1bD-CVI-T/R

4 Channel HD CVI/TVI/AHD Video and 1 bidirectional data on fiber optic core





Product Description

- Supports HD-CVI High Definition Composite Video Interface, AHD Analog High Definition, HD-TVI High Definition Transport Video Interface
- Support Full HD (720P 1080P) for video transmitting
- WDM Technology for Higher Reliability
- Modular industrial design ensuring reliability and flexibility
- FC and S T interface as fiber optic connector for your choice
- Stand alone and Rack mount (2U/4U Card type) for your choice
- Sampling rate up to 108 MHz and uncompressed video transmission (NRZ method)
- No Electrical or Optical Adjustments Required
- LED indication of working status for monitoring real-time operation

Full Description

This SAE-4V1bD-CVI-T/R is 4Channel HD-CVI/TVI/AHD Video and One channel bidirectional Data of our products, use advanced analog and digital technologies for pursuing high performance data transmission over fiber optic. The transceiver; optionally, can send signals more than 120 kilometers on fiber. This equipment is fully transparent from front-end HD-CVI/TVI/AHD video device perspective. Additionally, just one fiber core is used to transmit all mentioned signals which can be any kind of fiber cables.

The product is widely used in the field of CCTV, video surveillance, and national defense. This Optical Transceiver is easily monitored by virtue of LED indicators of working status and without any electrical or optical regulation on site. This product is released in standalone and rack-mount(2U/4U) packages, please consider when you place an order. SAE-4V1bD-CVI-T/R is made with high quality of rigorous screened components, which have superior performance in stability, environmental adaptability. It can work normally in very cold environment to hot from -40°C to +85°C. The product is planned in a way to have better resistance against corrosion and electromagnetic interference and work for years without any degradation in expected quality. Power input also made a suitable and reliable types of power, to get more powerful suitability to environment.



Applications

- CCTV and Security protection system
- Tele-Communication System
- Intelligent transportation supervisory system (ITS)
- Telemedicine
- E-learning & Campus monitoring
- Skyscraper Security Protection system

Technical specification

Environmental Aspects

Working Temperature	Storage Temperature	Relative humidity	Input Voltage/Power Supply	Transfer Mode	Dimensions
-40°C ~ +85°C	-45°C ~ +95 °C	0 ~ 90% Non-condensing	DC-5V/12.5W	Single mode/ Multi mode	173×100.5×59.5 mm

Link Budget:

1-multi mode transmitters

Fiber type	lose	Maximum Transmission Distance	Link Power	Wavelength
62.5 um	1(dB m/km)	500(meter)	-19.5~-16(dBm)	850, 1310(nm)

2-single mode transmitters

Fiber type	Lose	Maximum Transmission Distance	Link Power	Wavelength
9/125 um	0.5(dBm/km)	20(km)	-8~-5(dBm)	1310, 1550(nm)
9/125 um	0.5(dBm/km)	40(km)	-5~-3(dBm)	1310, 1550(nm)
9/125 um	0.25(dBm/km)	60(km)	-3~-1(dBm)	1310, 1550(nm)
9/125 um	0.25(dBm/km)	100(km)	0~+3(dBm)	1310, 1550(nm)



4 Channel HD CVI/TVI/AHD Video and 1 bidirectional data on fiber optic core

Video Analog Characteristics

Interface	Input/output Impedance	Input/output Voltage	Bandwidth	Sampling	Differential gain	Differential phase	SNR
BNC	75Ω(unbalanced)	5V- 2.5A	45MHz	Rate=108MHz	(10%-90%APL) DG<1%(typical value)	(10%-90%APL) DG<0.8° (typical value)	S/N<70dB

Data Characteristics

Direction	Controlling Equipment	Interface supporting terminal	Type of data:
Bi-directional	PTZ decoder, Keyboard, data interface of Matrix, High speed dome camera, industrial equipment	Standard industrial connector	RS485 (2 lines), RS232, RS422 and so on

RS485/RS422 Aspects (Optional)

Rate of RS485/RS422	Bit rate error	Max-number of nodes	Max transmission distance	Data Agreement	Direction	Type of data
0-255 Kbps	Less than 10E-12	128	1200meter	supporting all kinds of RS485/422	Reverse	Support point to point, support point to more point




Smart Architecture of Espadana

Designing, Production, Customization and Consultant Service
in Network and Fiber Optic System

4 Channel HD CVI/TVI/AHD Video and 1 bidirectional data on
fiber optic core

Product Size Display

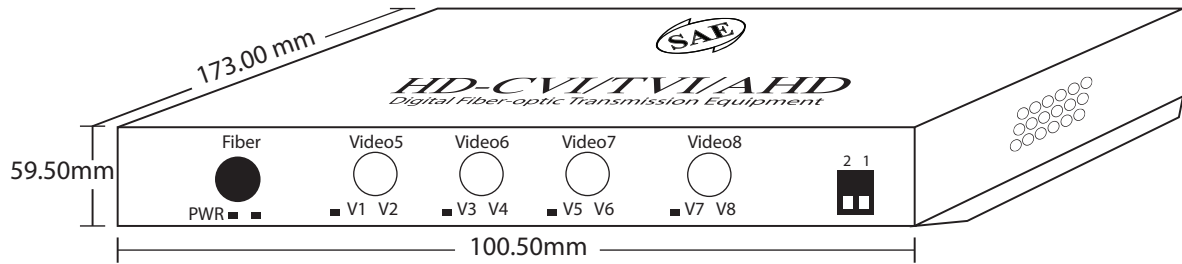

Product Application Display

