



Smart Architecture of Espadana

Designing, Production, Customization and Consultant Service
in Network and Fiber Optic System



Technical Specification

SAE-8P2ES-T/R

8 channel phone & 2 Fast Ethernet on 1 core optical link





Product Description

- 8 independent tip-ring RJ11 ports and 2 Fast Ethernet Ports
- Standard coding on fiber optic link
- Elements of telephone voice access as well as caller ID are supported
- Indicators are available for optical power link, data status and connectivity
- Anti-interference ability, built-in lightning protection deal
- G.8032, support <50ms industrial quick ring protection
- Fiber mode Interface: single fiber single mode/SC or FC and multi-mode(optional)

Full Description

This SAE-8P2ES-T/R provides multiplex of 8 channel RJ11 phone lines and 2 Fast Ethernet Ports on fiber optic as well as de-multiplex them in the best situation of tip-ring signal in the destination. Ideal combination of affordability and capabilities also high quality elements for entry level of phone signal, enterprise application which demands best quality in telecommunication, thus helps you create a more efficient workforce. SAE-8P2ES-T/R made by high quality of components were rigorous screened, have superior performance in stability, environmental adaptability. It can work normally in cold environment to hot from -10°C to +60°C. The product planned in a way of better resistance and ability to corrosion and electromagnetic interference. Power input also made a suitable and reliable types of power, to get more powerful suitability to environment.



Applications

- Recondition of telephone lines of a manufacture
- Relocation distance call system
- Remote multimedia teaching campus monitoring, video conferencing systems
- Telephone intercom, phone calls, related applications

Technical specification


Product name	SAE-8P2ES-T/R
Interface	
Ports	8 channel phone & 2 Fast Ethernet on 1 core optical link
Multi-mode Fiber (50/125um, 62.5/125um)- Optional	
<ul style="list-style-type: none"> ➤ Wave Length: 850nm ➤ Interface: SC or FC ➤ Transmitting distance: 0-2km ➤ Transmitting power: -12dBm (min)/ -9dBm (max) ➤ Receiver sensitivity: -28dBm (min) ➤ Link budget: 16dBm 	
Single mode Fiber (8/125um, 9/125um)	
<ul style="list-style-type: none"> ➤ Wave Length: 1310nm ➤ Interface: SC or FC ➤ Transmitting distance: 0-20km ➤ Transmitting power: -9dBm (min)/ -8dBm (max) ➤ Receiver sensitivity: -27dBm (min) ➤ Link budget: 18dBm 	
FXS Phone specification	
<ul style="list-style-type: none"> ➤ Voltage of Ring: 75V ➤ Frequency of Ring: 25Hz ➤ Total amount of resistance: 600 Ohm (pick up) ➤ Return loss: 40 dB ➤ Interface: RJ11 	
FXO Switch specification	
<ul style="list-style-type: none"> ➤ Voltage of Ring: 35V ➤ Frequency of Ring: 17Hz-60Hz ➤ Total amount of resistance: 600 Ohm (pick up) ➤ Return loss: 40Db ➤ Interface: RJ11 	



Power
Power supply: AC180V ~ 260V DC -48V DC +24V Max Power consumption: 7W
Dimension
Size: 210*105*30mm 19 inch 3U
Environmental Aspects
Working Temperature -10°c ~ 60°c; Storage Temperature -40°c ~ 80°c; Working Humidity 5% ~ 95% (non-condensing) Storage Humidity 5% ~ 95% (non-condensing)



Product Size Display

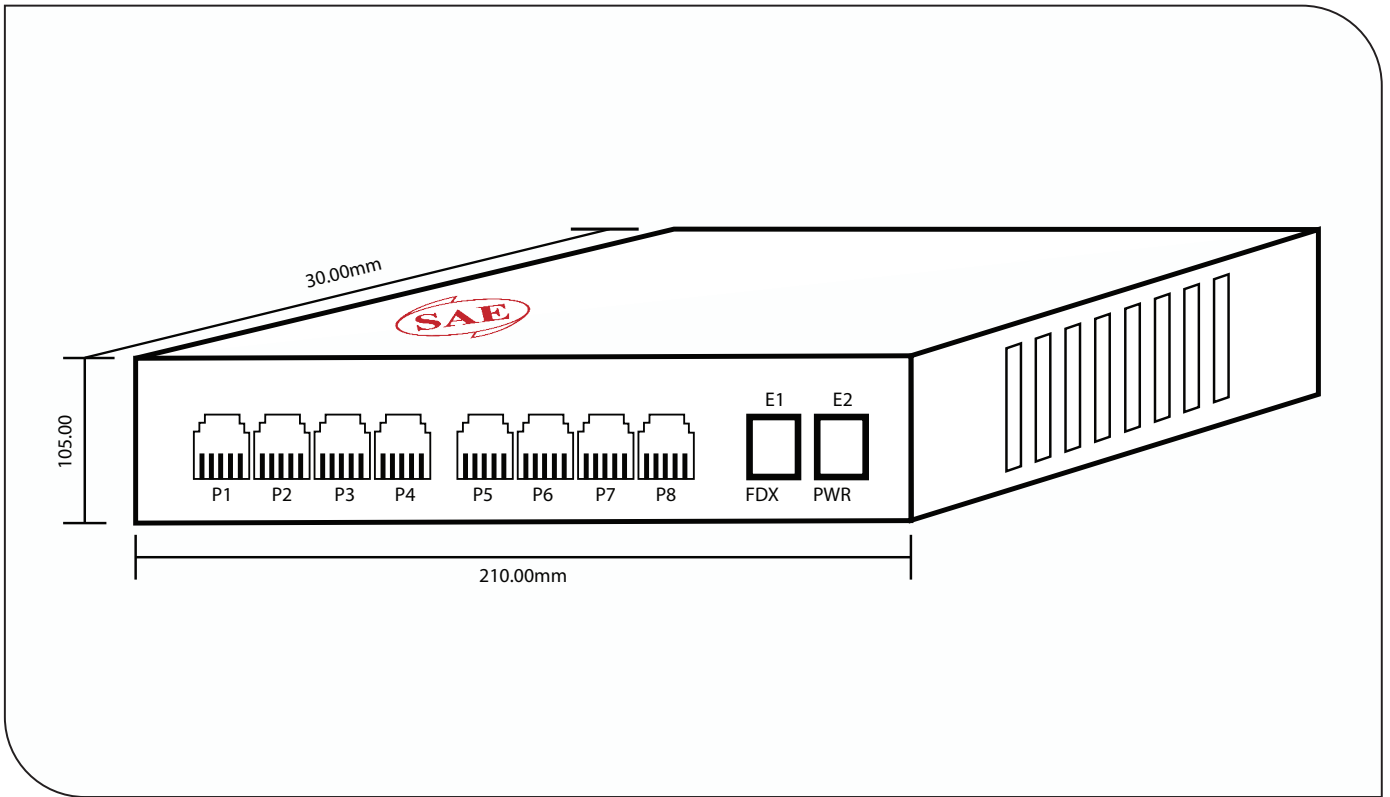

Product Application Display

