



Smart Architecture of Espadana


Designing, Production, Customization and Consultant Service
in Network and Fiber Optic System



Technical Specification

SAE-PE24240F-DGU

24 ports PoE 10/100Mbps switch & 2 Up-link Gigabit Combo port (SFP+Rj45)





Product Description

- 24 PoE ports support power over Ethernet for Power Devices, Support IEEE802.3af standard guaranty per ports (15.5 watt per port)
- 24 × RJ45 ports fast ethernet auto-sensing
- 2 × Combo ports (Gigabit SFP + Gigabit RJ45), Uplink ports: 1.25Gbps fiber interface
- Strong, reliable power supply
- 400 watts total power output
- Architecturally store-and-forward protocol
- Natural cooling by using method of Fan less design
- Metal compact package design, suitable for desktop or 1-U rack mount

Full Description

This SAE-PE24240F-DGU PoE switch prepare a field that power and data can feed from a single point, using Power over Ethernet (PoE) over a single cable. 24-fast Ethernet ports and 2-Combo ports (gigabit SFP + gigabit RJ45) prepare any 1000 Mbps link and the rest of 24ports can supply industry-standard IEEE 802.3af power for every PoE standard devices. Regards to using advanced auto-sensing algorithm the SAE-PE24240F-DGU gives power only to IEEE802.3af front-end devices, so don't worry about connecting PoE or non-PoE devices to this feeder.

Additionally, this good gives up the power when PoE devices are disconnected.

Intelligently, this PoE Switch SAE-PE24240F-DGU can recognized automatically PoE demands of devices, speed, duplex, and cable type using Auto Uplink™. Remarkably, it has two gigabit fiber ports (SFPs) that helps smart CCTV network designers to improve their planning and use the switch intelligently.

SAE-PE24240F-DGU made by high quality of components were rigorous screened, have superior performance in stability, environmental adaptability. The product planned in a way of better resistance and ability to corrosion and electromagnetic interference. Power input also made a suitable and reliable types of power, to get more powerful suitability to environment.



Applications

- IP cameras monitoring systems and transmitting systems
- Access points wireless systems and transmission data
- IP telephone, virtual PABX and intelligent unmanned systems
- Management and support Intelligent transportation supervisory (ITS)
- Monitoring TV medical and management
- School, campus, and... monitoring and remote control
- Wireless systems (AP) and transmission data

Technical specification


Product	SAE-PE24240F-DGU	
Performance		
Capacity in Millions of Packets per Second (64-byte packets) (Buffer Memory)	2.75M	
Switching Capacity in Gigabits per Second (Gbps) (Bandwidth)	64Gbps (non-blocking)	
Maximum Network Delay in microseconds (us)	maximum delay less than 20(μs)	
MAC Size	1K	
MTBF	190,000hours	
Interface		
Ports	24×PoE 10/100Mbps 2×Up-link 10/100/1000Mbps RJ45 2×1000Mbps SFP slot ports(Combo ports)	
protocol		
Store-And-Forward		
Supported Network Protocols and Standards		
<ul style="list-style-type: none"> ➤ IEEE 802.3i 10BASET ➤ IEEE 802.3u 100BASETX ➤ IEEE 802.3x Flow Control 		
Cable length detection	100m	
Power		
Output	Total: 400W	
Input	AC100-240V 50/60Hz (every country use a custom power plug)	



Environmental Aspects	
Dimension	440x280x44mm
Working environment	Operating Temperature: 0°C ~ 55°C Storage Temperature: -20°C ~ 75°C Operating Humidity: 10% ~ 95%, non-condensing



Product Size Display

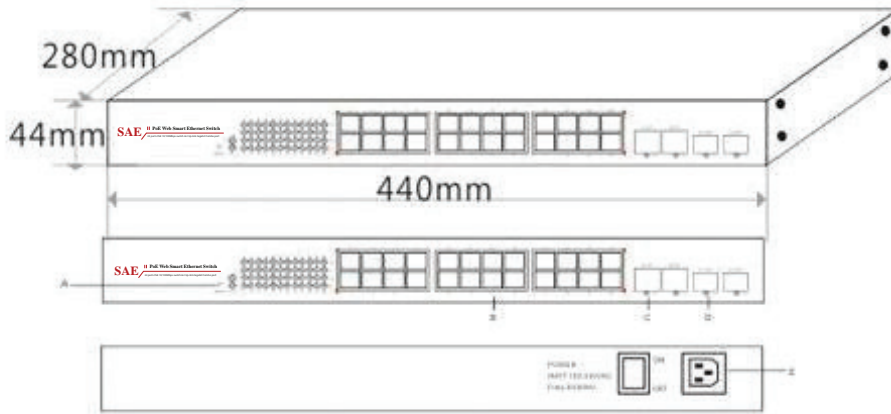

- A: Working LED indicator
- B: 24 Port
- C/D: Gigabit TP/SFP Combo Port
- E: 100-240VAC, 50/60Hz

Product Application Display

